

Glass Bottle Washing Equipment

THE EVOLUTION OF A GREAT COMPANY CONTINUES



Stanpac is excited to partner with **Central Fabricating**, an industry leader in industrial equipment design and fabrication to offer a line of automatic bottle washers. There are currently 6 models available with speeds ranging from 30 to 80 bottles per minute.

The washer shown here is model 856 designed to run up to 60 bottles per minute, easily handling bottles from 12 to 64 ounces. This equipment is designed to improve efficiency and maximize output while reducing environmental impact.

The compact footprint reduces space required while maximizing an effective washing cycle. It also allows for reduced running costs (water, electricity, chemicals) while ensuring the bottles are thoroughly cleaned and sanitized. The Central Fabricating Washer is easy to use and requires minimal maintenance which enables consistent output and minimal downtime. High quality standards and advanced technology make this washer an excellent choice.

STANPAC

PACKAGING PERFECTION FOR MORE THAN 70 YEARS

SPECIFICATIONS

- Model 640: 6 lanes x 40 rows x 30 bottles/minute
Overall size is 13'-5" long x 5'-8" wide
- Model 656: 6 lanes x 56 rows x 45 bottles/minute
Overall size is 17'-7" long x 5'-8" wide
- Model 840: 8 lanes wide x 40 rows x 40 bottles/minute:
Soak time: 3 minutes @ 40 bottles/minute.
Overall size including loading conveyor is 14ft long x 6ft 8" wide
- Model 856: 8 lanes wide x 56 rows x 60 bottles/minute:
Soak time: 3 minutes @ 60 bottles/minute,
Overall size including loading conveyor is 18ft long x 6ft 8" wide
- Model 1056: 10 lanes wide x 56 rows x 75 bottles/minute:
Soak time: 3 minutes @ 75 bottles per minute.
Overall size including loading conveyor is 18ft long x 7ft 4" wide
- Model 1064: 10 lanes wide x 64 rows x 80 bottles/minute:
Soak time: 3 minutes @ 80 bottles per minute.
Overall size including loading conveyor is 20ft long x 7ft 8" wide

TEMPERATURE (ADJUSTABLE):

- Zone 1 Caustic Soak: 145F (adjustable up to 180F)
- Zone 2 Tempering Spray: 115F (adjustable up to 180F)
- Zone 3 Potable Spray: Temperature as supplied by water source

FEATURES

MATERIALS:


- Tanks and structure are 300 series stainless steel.
- Spray system fabricated with sanitary tubing and quick clamp connections for easy cleaning
- All components are wash down rated

PUMPS/MOTORS:

- 2x 2hp spray pumps
- 1x 1.5hp main drive motor/reducer
- 1x 1/3hp loading conveyor motor/reducer
- All motor speeds adjustable with frequency drives
- Voltage: available in standard voltages 240V/480V/600V
- Adjustable spray nozzle position with test-spray buttons
- 4x 14" x 17" manways for cleaning access to tanks

PLC/CONTROLS:

- Touch screen Allen Bradley PLC with data logging
- Push button panel for operator controls with warning lights and e-stop
- Profiles for different bottle sizes
- All aspects of the washing "recipe" can be adjusted: temperatures, spray pressures, speeds and warning lights.
- Data logging for water consumption, machine cycles, operating time.

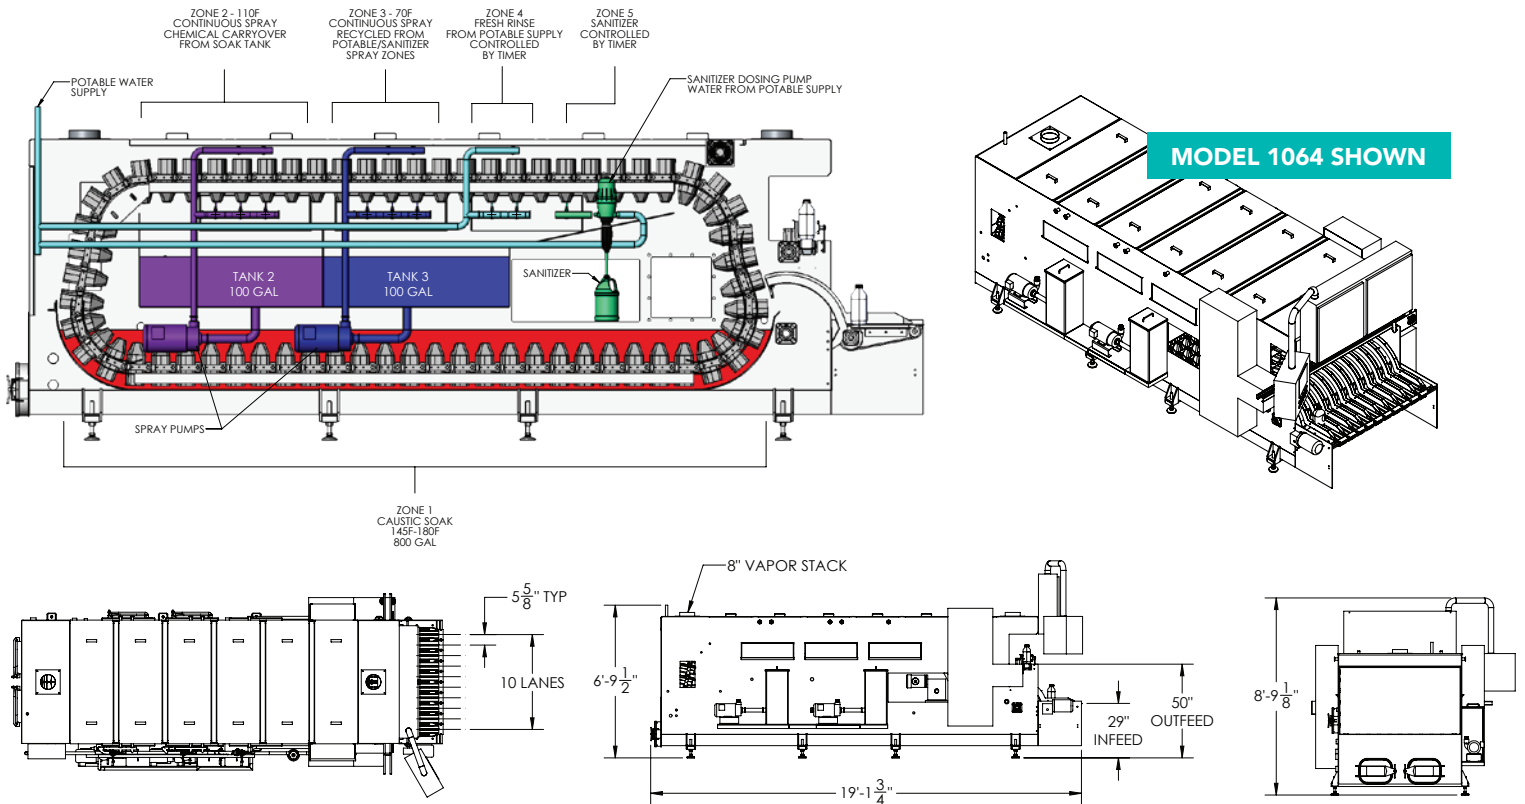

To Learn More, Contact Us Today!

Stanpac manufactures dairy packaging for companies throughout the United States, Canada, and many locations worldwide.

STANPAC

SMITHVILLE, ONTARIO · BRENHAM, TEXAS · TOTAWA, NEW JERSEY · QUERETARO, MEXICO
STANPACNET.COM | 905 957 3326